



# 140S

## Silicone Spring Adjustable Astragal Seal Set

### PRODUCT CUT SHEET

PROJECT:

SUBMITTED BY:

DATE:

NOTES:


#### Material

Aluminum Alloy 6063, T5 Temper  
Synthetic Rubber Polymer: Siloxane  
Silicone is Black

- ▶ Excellent Flexibility and Memory
- ▶ Flame Resistant
- ▶ Moisture Resistant
- ▶ Temperature Range -100°F to 500°F, Remains Flexible at Extreme Temperatures
- ▶ Excellent Resistance to Ozone, UV and Aging
- ▶ Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ Adjustment Screws on 10" Centers Allow Adjustment of the Seal Without Re-Positioning Mounting Location
- ▶ Spring-Loaded to Maintain Constant Pressure for the Most Effective Seal
- ▶ Provided as Two-Piece Set

#### Finishes

140SA Anodized Aluminum  
140SDKB Dark Bronze

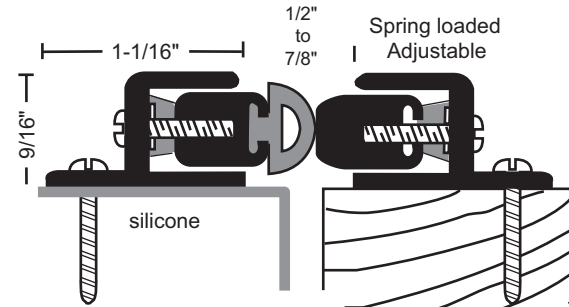

NGP-GKT-140S-PCS-1220-A