



223N

Neoprene E-Z Touch Automatic Door Bottom

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:


Material

Aluminum Alloy 6063, T5 Temper
Synthetic Rubber Polymer Blend: PVC, Nitrile Rubber (NBR), and Chloroprene Closed Cell Advanced Elastomeric Foam
Neoprene is Black

- ▶ Very Good Abrasion Resistance, Tensile Strength and Memory
- ▶ Flame Resistant
- ▶ Moisture Resistant
- ▶ Temperature Range -20°F to 200°F
- ▶ Good Resistance to Ozone, Sunlight and Aging
- ▶ The EZ-Touch Door Bottom Requires Only 3 to 5 Pounds of Pressure to Activate
- ▶ Perfect for Accessibility Applications and Still Provides an Effective Seal
- ▶ Available 23 1/4" Net to 48" in Length
- ▶ End Caps Furnished Standard
- ▶ 3/4" Max Drop

Finishes

223NA Anodized Aluminum
223NB Gold
223NDKB Dark Bronze

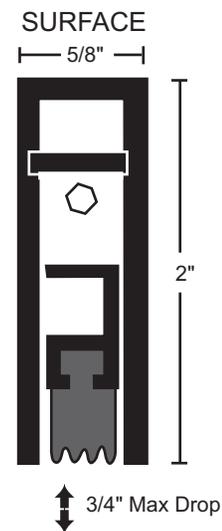

NGP-GKT-223N-PCS-1220-A