




PRODUCT SPECIFICATIONS

For more information visit www.hagerco.com

3540 Knob - Privacy (F76A)

Applications

Standard Duty Commercial

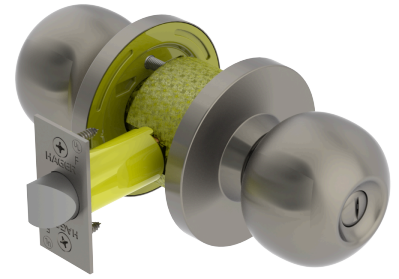

PRODUCT SPECIFICATIONS

Backsets:

- 2-3/4" (70mm) - Standard
- 2-3/8" (60mm) - Optional

Certifications:

- Meets BHMA Certified ANSI A156.2, Series 4000, Grade 2
- UL/cUL Listed for all functions up to 3 hours for "A" label single doors
- UL10C Positive Pressure Rated

Door Thickness:

- 1-3/8" - 1-3/4" (35mm - 45mm)

Exposed Trim:

- Wrought Brass or Stainless Steel

Finishes:

- US3 and US32D

Functions:

- Privacy (F76A)

Knob Diameter:

- 2-1/4" (58mm)

Latchbolt Type:

- 1/2" Throw - Stainless Steel

Lock Chassis:

- Heavy guage steel, zinc dichromated for corrosion resistance

Product Name:

- Grade 2 Cylindrical Knob

Rose Diameter:

- 3" (76mm)

Strikes:

- 3935 - 1-1/4" x 4-7/8" (32 mm x 124 mm) ASA strike
- Other strikes available

Warranty:

- Lifetime