5070

TPE Double Shark Fin Smoke Seal

PRODUCT CUT SHEET

Material

Self-Adhesive Thermo-Plastic Elastomer (TPE)

- Good Abrasion Resistance
- Moisture Resistant
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold, Air Infiltration and Energy Performance
- Rigid Base with Flexible Elastomeric Fins
- Flame Resistant
- Temperature Range -60°F To 275°F
- Anti-Microbial: Treated with an Anti-Microbial Additive to Inhibit the Growth of Microorganisms
- REACH and RoHS Compliant
- Modified Acrylic Pressure Sensitive Adhesive Protected by Release Liner
- Provides High Initial Adhesion and Long Term Holding Power for Permanent Mounting in Exterior or Interior Locations
- Resistant to Aging, Weathering, Uv Radiation, Water, Detergent, Alcohol and the Influence of Chemicals
- End Use Temperature Range of Adhesive, Long Term Exposure -30°F Up To 250°F
- Shelf Life of Adhesive Prior to Installation is One Year When Stored at 75°F and 50% Relative Humidity or Less
- Smoke Rated for Perimeter and/or Meeting Edge Astragal Applications
- ½" Wide x ³⁄₁₆" Tall
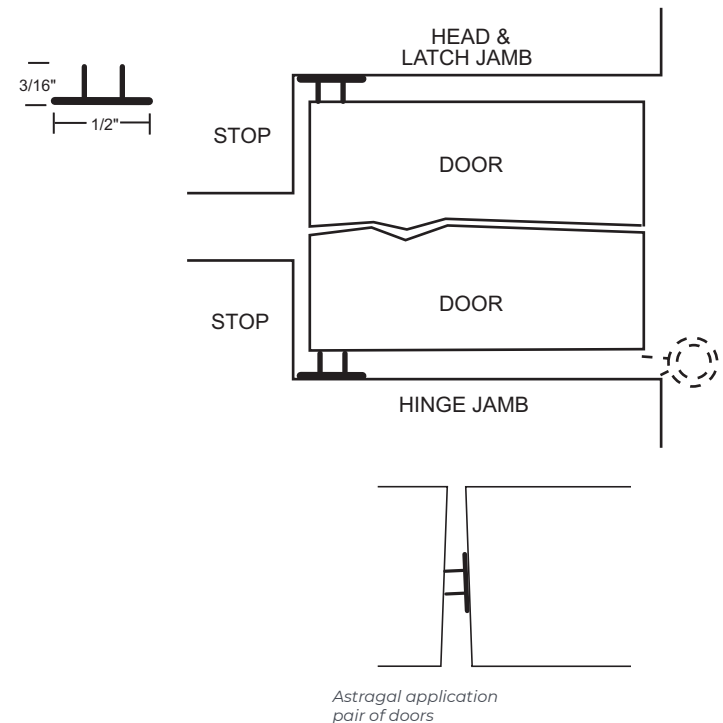- Available in 36", 48", 72", 84", 96" and 108" Lengths

* Anti-microbial not available in clear

Color
5070B   Brown
5070CL Clear

STC 35

BHMA CERTIFIED

3/16"

1/2"

HEAD & LATCH JAMB

STOP

DOOR

STOP

DOOR

HINGE JAMB

Astragal application pair of doors