



706

Perimeter Seal Compatible with Parallel Arm Closers

PRODUCT CUT SHEET

Material

Aluminum Alloy 6063, T5 Temper
Synthetic Polymer: Polyamide
Nylon Brush

- Excellent Abrasion Resistance, Flexibility and Memory
- Moisture Resistant
- Retains Insecticides Well
- Temperature Range -70°F to 425°F
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold, Air Infiltration and Smoke Infiltration in Most Common Profiles as Indicated by BHMA Certified Symbol
- REACH and RoHS Compliant
- Not Effective Against Water Penetration
- No Break-in Seal for Closer Mounting
- Closer and/or Overhead Holder Attach to Frame Through Weatherseal Section. Install Seal First
- Allows Mounting of Rim Exit Device Strikes Without Notching Gasketing
- Head Section Not Drilled
- Jamb Sections Furnished With Slotted Holes for Adjustment
- Self-Drilling #8 (Tek Type) Screws Furnished

Finishes


706A Anodized Aluminum
706B Gold
706DKB Dark Bronze

Options

FATT - Fast Attach Tape



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

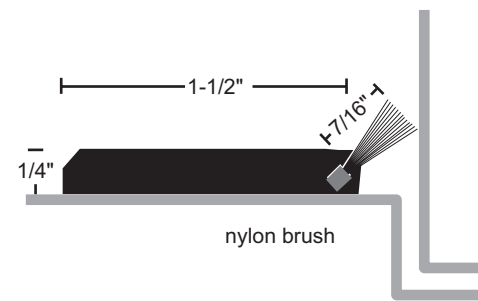

NGP-GKT-706-PCS-1120-A