



9115

Allseal® Smoke-Rated Astragal Seal Set

PRODUCT CUT SHEET

Material

Aluminum Alloy 6063, T5 Temper
Synthetic Rubber Polymer: Siloxane Closed Cell Sponge
Silicone Plus is Tan



- Premium Grade Seals Specially Formulated to Withstand Greater Temperature Extremes While Providing Maximum Protection Against Air Infiltration
- Excellent Flexibility and Memory
- Flame Resistant
- Moisture Resistant
- Temperature Range -100°F to 500°F, Remains Flexible at Extreme Temperatures
- Excellent Resistance to Ozone, UV and Aging
- Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- Fire-Rated Astragal Seals Cannot Replace Any Astragal Required on the Door by the Door Manufacturer to Maintain Its Fire Label
- IBC, NFPA 80, NFPA105, and NFPA 252 Require the Gap at the Meeting Edge Between Fire Labeled Doors Must Not Exceed 1/8"
- #6 X 3/4" Stainless Steel Sheet Metal Screws Furnished
- Screw Holes Slotted for Adjustment
- Provided as Two Piece Set

Finishes

9115A Anodized Aluminum
9115B Gold
9115DKB Dark Bronze



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

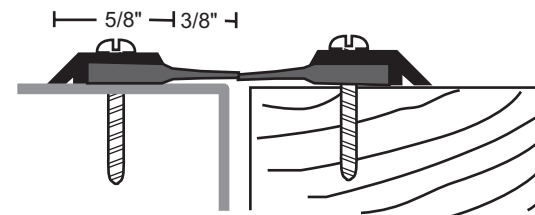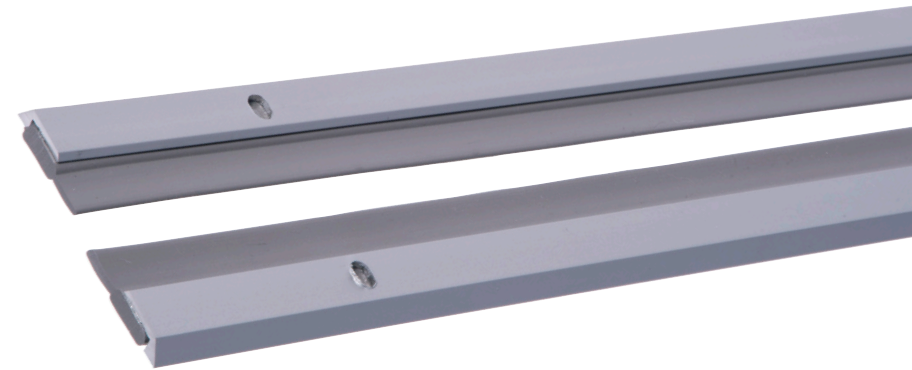

NGP-GKT-9115SET-PCS-1120-A