QED 300 Series: Grade 1 Standard-Duty Exit Devices

Rim Type

Performance Features

- Tested and certified to significantly exceed 500,000 cycles required for Grade 1 certification.
- Field sizeable. 36" to 32" door application (91.44cm-81.28cm).
- Consistent styling allows for harmonization with other STANLEY Commercial Hardware products.

Certifications

- ANSI/BHMA A156.3 Grade 1.
- UL/cUL listed (3 hours) for "A" label door applications (8' x 8')
- ANSI A117.1 Section 404.2.6 Accessibility Code (ADA Compliant)









Product Specifications

- Handing All QED300 Series Exit Devices are non-handed.
- Door thickness 1 3/4" standard (44.5mm).
- Latch bolt Stainless steel 3/4" throw (19mm).
- Strike Stainless steel body with plated steel roller standard fire-rated stainless steel strike, with stainless steel roller standard on QED313.
- Fasteners Wood and machine screws standard. Sex bolts optional. (Standard on fire-rated device).
- Head cap & end cap Zinc die-cast.
- Trims Sierra, Summit and Slate styles available. Escutcheon offering – Dummy, passage, keyed, night latch. Pull plate offering – Dummy, thumbpiece, night latch, flat plate.
- Stile width 3 7/8" minimum (98mm).
- Dogging Hex key dogging and cylinder dogging available.
- Standard backset 2 1/4" (57mm) to face of doorstop.

Keying

Offered with the following keyway options: BF-SFIC "F", KW-Kwikset, WE-Weiser, SC-Schlage, GA-Yale, LA-Sargent & LC-Less Cylinder.
Consult factory for other cylinder options and for details on Mortise and Rim Cylinder requirements.

Warranty

• Lifetime Mechanical and 3-year finish







QRT360 M

QRT320 E

Functions

Series	Description
QED311	Rim Hex Dog
QED312	Rim Cylinder Dog
QED313	Rim Fire-Rated

Exit Trim Offerings

ANSI	Series	Description
02	QET320	Dummy Lever Escutcheon
02	QET325	Dummy Pull Plate
14	QET330	Passage Lever Escutcheon
08	QET360	Keyed Lever Escutcheon
05	QET365	Thumbpiece
02	QET367	Dummy Thumbpiece Pull Escutcheon
03	QET370	Night Latch Lever Escutcheon
03	QET375	Night Latch Pull
_	QET377	Gull Wing Pull Escutcheon
01	QET390	Flat Plate
02	QRT320	Dummy Round Rose Lever
14	QRT330	Passage Round Rose Lever
08	QRT360	Keyed Round Rose Lever
03	QRT370	Night Latch Round Rose Lever

Finishes

ВНМА	Description	
689	Painted Aluminum	
690	Painted Duranodic Bronze	

QED 300 Series: Grade 1 Standard-Duty Exit Devices

STANLEY

Surface Vertical Rod (SVR) Type

Performance Features

- Tested and certified to significantly exceed 500,000 cycles required for Grade 1 certification.
- Field sizeable. 36" to 32" door application (91.44cm-81.28cm).
- Thru-bolt trim design for increased security and durability.
- Consistent styling allows for harmonization with other STANLEY Commercial Hardware products.

Certifications

- ANSI/BHMA A156.3 Grade 1.
- UL/cUL listed (1.5 hours) for "A" label door applications (8' x 8')
- ANSI A117.1 Section 404.2.6 Accessibility Code (ADA Compliant)









Product Specifications


- Handing All QED300 Series Exit Devices are non-handed.
- Door thickness 1 3/4" standard (44.5mm).
- Door height 7' standard with 84" rods; 8' optional with 96" rods (2.1336m x 2.438m).
- Latch bolt 1/2" (12.7mm) throw on top latch; 3/8" (9.53mm) on bottom latch,
- Fasteners Wood and machine screws standard. Sex bolts optional. (Standard on fire-rated device).
- Head cap & end cap Zinc die-cast.
- Trims Sierra, Summit and Slate styles available. Escutcheon offering – Dummy, passage, keyed, night latch. Pull plate offering – Dummy, thumbpiece, night latch, flat plate.
- Stile width 3 1/2 " minimum (89mm).
- Dogging Hex key dogging and cylinder dogging available.
- Standard backset 2 1/4" (57mm) to face of doorstop.
- OED319 includes bottom fire latch.

Keying

 Offered with the following keyway options: BF-SFIC "F", KW-Kwikset, WE-Weiser, SC-Schlage, GA-Yale, LA-Sargent & LC-Less Cylinder. Consult factory for other cylinder options and for details on Mortise and Rim Cylinder requirements.

Warranty

• Lifetime Mechanical and 3-year finish



Series	Description
QED314	SVR Hex Dog
QED315	SVR Cylinder Dog
QED316	SVR Fire-Rated
QED317	SVR Less Bottom Rod – Hex Dog
QED318	SVR Less Bottom Rod – Cylinder Dog
QED319	SVR Less Bottom Rod – Fire-Rated


Exit Trim Offerings

ANSI	Series	Description
02	QET320	Dummy Lever Escutcheon
02	QET325	Dummy Pull Plate
14	QET330	Passage Lever Escutcheon
08	QET360	Keyed Lever Escutcheon
05	QET365	Thumbpiece
02	QET367	Dummy Thumbpiece Pull Escutcheon
03	QET370	Night Latch Lever Escutcheon
03	QET375	Night Latch Pull
01	QET390	Flat Plate
02	QRT320	Dummy Round Rose Lever
14	QRT330	Passage Round Rose Lever
08	QRT360	Keyed Round Rose Lever
03	QRT370	Night Latch Round Rose Lever

Finishes

внма	Description	
689	Painted Aluminum	
690	Painted Duranodic Bronze	

QED 300 Series: Grade 1 Standard-Duty Exit Devices

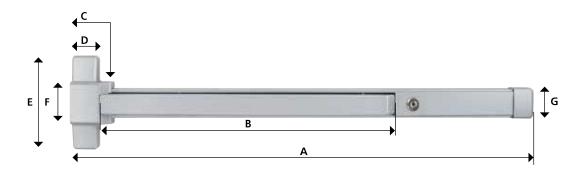

	36" Device							
QED300 Series	Minimum Door Width	Device Length	Pushpad Length	Head Cap Length	Head Cap Length	Head Cap Width	Head Cap Width	End Cap Length
Measurement		А	В	С	D	Е	F	G
Panic Rated	30"	27"	19"	2.75"	1.75"	6.25"	3"	2"
(with Dogging)	762mm	685.80mm	482.60mm	69.90mm	44.50mm	158.80mm	76.20mm	50.80mm
Fire-Rated or Panic	28"	25"	19"	2.75"	1.75"	6.25"	3"	2"
with Dogging Removed	711.20mm	635mm	482.60mm	69.90mm	44.50mm	158.80mm	76.20mm	50.80mm

Model/Series	Functions	Case Qty
QED311	Rim Hex Dog	4
QED312	Rim Cylinder Dog	4
QED313	Rim Fire-Rated	4
QED314	SVR Hex Dog	4
QED315	SVR Cylinder Dog	4
QED316	SVR Fire-Rated	4
QED317	SVR Less Bottom Rod – Hex Dog	4
QED318	SVR Less Bottom Rod – Cylinder Dog	4
QED319	SVR Less Bottom Rod – Fire-Rated (Includes Auxiliary Bottom Fire Latch)	4

Other Options

8FT	Vertical rod kit for 8FT door application
48"	48" Device

STANLEY

How to Order

QED 300 Series: Grade 1 Standard-Duty Exit Devices

Example

If you ordered: QED315 36" 7FT 689 KW KD

You would get: Grade 1 Standard-Duty Surface Vertical Rod Exit Device 36," with Cylinder Dogging, for a 7' height, in Painted Aluminum finish. Kwikset Keyway, Keyed Different.

