

# Securitron® CEPT Concealed Electrical Power Transfer

*Beautifully crafted, compact,  
secure power transfer*



The heavy-duty, tamper-resistant Concealed Electrical Power Transfer (CEPT) securely transfers power and data from the hinge side of the frame to electrified hardware on the door.

The unit is discreetly concealed between the frame and door when the door is closed. Available in three multi-wire configurations and four finishes, the CEPT complements any architectural setting.

## Features

### Standard Features

- Mortises into the edges of the door and frame
- Direct retrofit for competitor products
- Tamper resistant
- All metal construction including back boxes
- 7/8" [22.25mm] knockouts on back boxes accommodate EMF-type fittings
- Tested to 1 million cycles
- Compatible with butt hinges up to 6" [152.4mm] and continuous hinges with cutout
- MagnaCare® lifetime replacement, no-fault, no questions asked warranty

### Optional Features

- **CEPT-10** includes 8–22 AWG wires plus 2–18 AWG wires for higher current devices
- **CEPT-C5E** includes CAT5E compatible with 8–24 AWG wires, 1–22 AWG wire, conductor, Molex connectors
- **EL-CEPT** is ElectroLynx® compatible with 12–22 AWG wires, ElectroLynx connectors



MagnaCare  
Warranty



Fire Rated



Windstorm  
Resistant

## Specifications

### Certifications

- ANSI/UL 10C Listed, 3 hour rated
- ULC-S318 Listed, 3 hour rated
- ANSI/SDI-BHMA A250.13 (+/- 150 psi) Windstorm Listed
- Florida Building Code Approved

### Dimensions

- **CEPT Housing:**  
9-1/16"L x 1-3/16"W x 1-7/16"D  
[230.2mm L x 30.12mm W x 36.52mm D]

### Shipping Weight



- 2.40 lbs [1.09 kg]

### Technical Note

- Not for use with center hung or balanced doors, pocket or offset pivots or swing clear hinges.
- Door swing ranges when installed with butt hinges are:

| HINGE SIZE              | SWING RANGE |
|-------------------------|-------------|
| 5" [127mm] or less      | up to 180°  |
| 5-1/2" [139.7mm]        | up to 130°  |
| 6" [152.4mm] Butt Hinge | up to 110°  |

## Dimensions

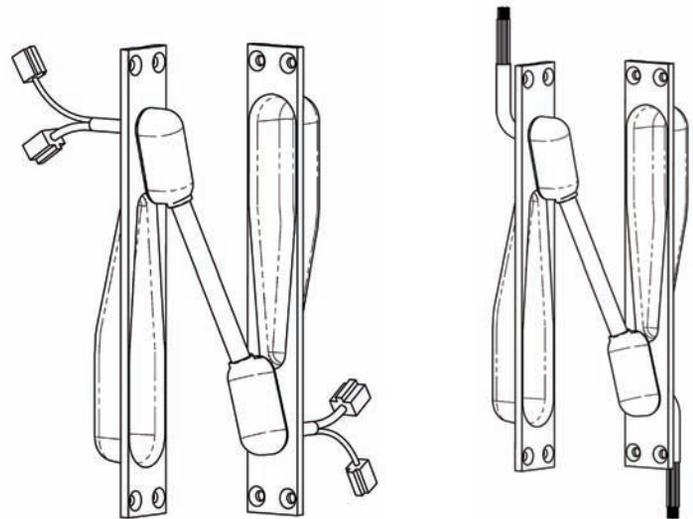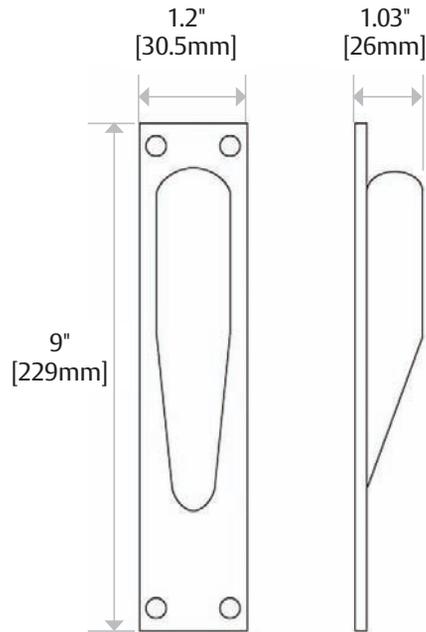


## How to Order

| WIRE CONNECTORS           | SHAPE                                 | NUMBER OF WIRES                   | FINISH                              |
|---------------------------|---------------------------------------|-----------------------------------|-------------------------------------|
| <b>EL</b>                 | <b>- CEPT</b>                         | <b>- C5E</b>                      | <b>- 10B</b>                        |
| (blank) No Connectors     | <b>CEPT</b> Concealed Power Transfers | (blank) 12 Wires (EL option only) | (blank) 630 Satin Stainless Steel   |
| EL Electrolynx Connectors |                                       | 10 10 Wires                       | 04 606 Satin Brass                  |
|                           |                                       | C5E 9 Wires                       | 10 612 Satin Bronze                 |
|                           |                                       | NW no Wires                       | 10B 613 Dark Oxidized Satin Bronzed |

NOTE: Not every combination is possible. Please contact factory if you need a combination of features not listed above.

# Securitron® SEPT Square-Cut Electrical Power Transfer

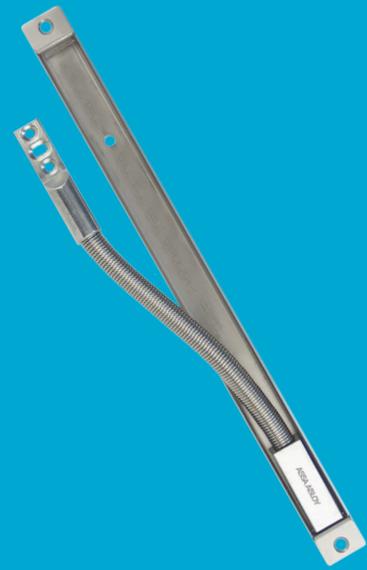

*Square tabs, medium length for flexible power & data transfer*

Concealed, secure conduit for power and data transfer between a frame and door.

This unit is designed with a stamped steel housing and spring steel conduit to protect power and data wires. The square mounting tabs provide easier installation for recessed installation. The Securitron SEPT can be used on swing doors with butt hinges, continuous hinges or pivots with less than 3/4" offset.



Square mounting tabs simplify recessed prep on any door

## Features

### Standard Features

- Heavy duty design
- Installs in the door and frame edges
- Flexible steel shield protects wires – 1/4" [6.3mm] inside diameter
- Works with almost any type of butt hinge or continuous hinge
- MagnaCare® lifetime replacement, no-fault, no questions asked warranty

### Optional Features

- SEPT-10 includes 8–22 AWG wires plus 2–18 AWG wires for higher current devices
- SEPT-C5E CAT5E compatible with 9-22 AWG wire stranded conductor, Molex connectors
- EL-SEPT ElectroLynx® compatible with 12-22 AWG Wires, ElectroLynx connectors



## Specifications

### Certifications


- UL 10C Listed
- CAN4-S104 Listed
- ANSI A250.13 (+/- 150 psi)
- Windstorm Listed

### Shipping Weight

- 0.85 lbs [0.39 kg]

## Dimensions

- Interior Flex Shield: 1/4" [6.3mm]

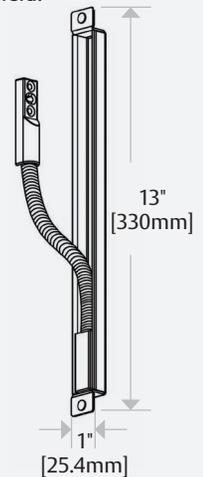

## How to Order

| WIRE CONNECTORS           | SHAPE                          | NUMBER OF WIRES  |
|---------------------------|--------------------------------|------------------|
| EL                        | – SEPT                         | – C5E            |
| (blank) No Connectors     | SEPT Square Cut Power Transfer | (blank) 12 Wires |
| EL ElectroLynx Connectors |                                | 10 10 Wires      |
|                           |                                | C5E 9 Wires      |

NOTE: Not every combination is possible. Please contact factory if you need a combination of features not listed above.



# Securitron<sup>®</sup> EPT Electrical Power Transfer

*Concealed, tamper resistant,  
flexible power and data transfer*



The Securitron EPT Electric Power Transfer provides concealed, secure power and data conduit between a frame and door, transmitting power to electrified locks, exit bars and more.

Its durable stamped steel housing and flexible spring steel conduit make the Securitron EPT suitable for most types of swinging doors with butt or continuous hinges or pivot hinges up to 3/4" offset. The Securitron EPT-SC accommodates swing-clear hinges and most pivot hinges.

## Features

### Standard Features

- Installs in the door and frame edges
- Flexible steel shield protects wire bundles up to 5/16" [8mm] thick
- Works with almost any type butt hinge, continuous hinges and some pivot hinges.
- Rounded mounting tabs
- MagnaCare<sup>®</sup> lifetime replacement, no-fault, no questions asked warranty

### Optional Features

- **EPT** for standard hinges and pivot hinges less than 3/4" [19mm] offset
- **EPTL** for extended length up to 5" center to center
- **EPT-SC** for swing-clear hinges or pivot hinges with larger offset; not for use with center pivot doors
- **EL** Models are Electrolynx<sup>®</sup> compatible including 12–22 AWG wires, Electrolynx connectors



*NOTE: Not every combination is possible.  
Please contact factory if you need a  
combination of features not listed above.*



MagnaCare  
Warranty



Windstorm  
Resistant

# Specifications

## Certifications

- UL 10C Listed
- CAN4-S104 Listed
- UL 634 Listed (EL-EPT/ EL-EPTL)
- ULC/ORD-C634 (EL- EPT/EL-EPTL)
- ANSI/SDI-BHMA A250.13 (+/- 60 PSF) Windstorm Listed

## Dimensions

- EPT Housing: 12-3/4" L x 7/8" W x 11/16" D [323.9mm L x 24.8mm W x 17.5mm D]
- EPTL Housing: 21-3/8" L x 7/8" W x 11/16" D [542.9mm L x 24.8mm W x 17.5mm D]
- Interior Flex Shield: 3/8" [9.5mm]

## Shipping Weight

- EPT: 0.75 lbs [0.34 kg]
- EPTL: 1.20 lbs [0.54 kg]
- EPT-SC: 1.25 lbs [0.57 kg]
- EL-EPT: 0.75 lbs [0.34 kg]
- EL-EPTL: 1.20 lbs [0.54 kg]
- EL-EPT-SC: 1.25 lbs [0.57 kg]

# How to Order

| WIRE CONNECTORS            | SHAPE          | DOOR SWING/OPTIONS          |
|----------------------------|----------------|-----------------------------|
| <b>EL</b>                  | <b>- EPT</b>   | <b>- SC</b>                 |
| (blank) No Connectors      | EPT 10" Cord   | (blank) Standard Swing      |
|                            |                | SC Swing Clear / Pivots     |
|                            |                | CSE 9 Wires                 |
| EL ElectroLynx® Connectors | EPTL 18" Cord* | (blank) Standard Swing Only |

\*EPTL is only available in standard swing. No other options available.

# Dimensions

